


SPECIALTY FABRICS

ASPHALT VINYL COATED NYLON

61¼" wide. 16 oz. per square yard. 840 denier.
 Designed for asphalt haulers with high
 temperature resistance. Resists kerosene.
 Meets FM VSS-302. Made in the USA

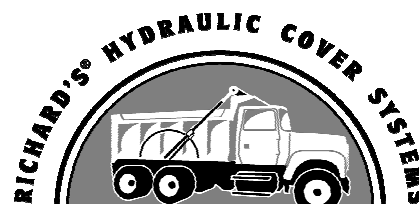

154 TORRINGTON ROAD, WINSTED, CT 06098
 PHONE 860-379-2427 FAX 860-379-2439
 WWW.THEKINGOFCOVERS.COM

Product Number	Color
VCN-163304	Black

Fabric Properties	Test Method	Typical Properties
Weight, oz./sq. yd.	FS 5041	16
Adhesion	Heat Seal	12.0
Tongue Tear, lbs.	FS 5134	
Warp		198
Fill		141
Trap Tear, lbs.	FS 5136	
Warp		45
Fill		40
Strip Tensile, lbs.	FS 5102	
Warp		327
Fill		325
Grab Tensile, lbs.	FS 5100	
Warp		327
Fill		325
Cold Crack, °F	MIL-C-2069E, para. 4.3.7	-65°F
Mullen Hydrostatic, psi	FS 5512	700
Mullen Burst, psi	ASTM D 3786	700
Oil Resistance	MIL-C-20696E, para. 4.3.2	Pass
Hydrocarbon Resistance	MIL-C-20696E, para. 4.3.3	Pass
Puncture Resistance	FS 2031, Fed. Std. 101c	230.2
Flame Retardance	Available on Request	
After Flame, secs.		-
Char Length, in.		-
FMU89302		4"/Min. Max
High Temperature Resistance		
Blocking 200 f/30 min.	FS 5872	No. 1 Pass
Blocking 180 f/4 hrs.	FS 5872	No. 1 Pass
Kerosene Resistance	MIL-C-20696E, para. 4.3.2	Pass